


FLOOR PLAN
SCALE: 1:100
384.0 GSM

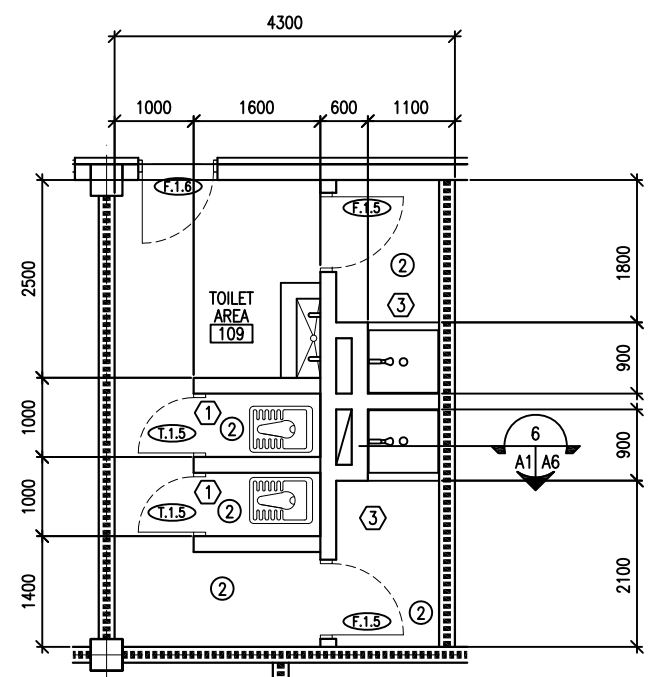

ENLARGED TOILET PLAN
SCALE: 1:50

GENERAL NOTES:

- INTERIOR PARTITIONS SHALL BE 200 MM CMU UNLESS NOTED OTHERWISE.
- OPENINGS FOR DOORS SHALL BE LOCATED 200 MM FROM THE ADJACENT WALL UNLESS NOTED OTHERWISE.
- SURFACES TO BE PAINTED SHALL BE CLEAN AND FREE OF FOREIGN MATTER BEFORE APPLICATION OF PAINT. CLEANING SHALL BE SCHEDULED SO THAT DUST AND OTHER CONTAMINANTS WILL NOT FALL ON WET, NEWLY PAINTED SURFACES.
- CONCRETE AND INTERIOR MASONRY SURFACES GROUTED SOLID SHALL BE ALLOWED TO DRY AT LEAST 30 DAYS BEFORE PAINTING EXCEPT CONCRETE SLAB ON GRADE WHICH SHALL BE ALLOWED TO CURE 90 DAYS BEFORE PAINTING.
- PAINTS CONTAINING LEAD IN EXCESS OF 0.06 PERCENT BY WEIGHT OF THE TOTAL NONVOLATILE CONTENT SHALL NOT BE USED.
- MERCURIAL FUNGICIDES SHALL NOT BE USED IN OIL-BASE PAINT.
- REMOVE LOOSE DIRT AND CLEAN SURFACES BEFORE PAINTING. APPLY PAINT TO INTERIOR STRUCTURAL RIGID FRAMINGS AND CEILINGS AND TEST FOR ADHESION. PRIMER COAT FOR MASONRY. INITIAL FIRST COAT WITH AN ACRYLIC LATEX PAINT FOR EXTERIOR SURFACES AND A SECOND COAT WITH A WATER REPELLENT ACRYLIC LATEX PAINT.
- METAL DOORS AND FRAMES SHALL RECEIVE A PRIMER COAT PLUS TWO COATS OF PAINT.
- DIMENSIONS ARE TO STRUCTURAL COLUMN GRID, EDGE OF WINDOW OPENINGS, AND TO HINGE SIDE OF DOOR OPENINGS.
- PROVIDE 1 HOUR FIRE RATED PARTITIONS IN ACCORDANCE WITH NFPA 101, 28.3.7.1. FILL ANULAR SPACE AT ANY AND ALL FLOOR, WALL OR CEILING PENETRATIONS WITH APPROPRIATE FIRE STOPPING MATERIALS.

ROOM FINISHES:

- WALLS: PAINTED PLASTER,
FLOOR: SEALED CONCRETE
CEILING: PAINTED PLASTER APPLIED TO STRUCTURE
- WALLS: 2400 MM HIGH CERAMIC TILE WAINSCOT,
FLOOR: PAINTED PLASTER ABOVE WAINSCOT
CEILING: CERAMIC TILE
CEILING: PAINTED PLASTER

KEY NOTES:

- TYPICAL TOILET STALL LAYOUT - RE: DETAIL 2/A6
- CONCRETE SIDEWALK RE: DETAIL 2/A7 AND 3/A7
- TWO-PIECE WALL THIMBLE AND TRIM PLATE MOUNTED IN WALL ABOVE WINDOW.
- LINE OF ROOF OVERHANG ABOVE
- TWO-PIECE WALL THIMBLE AND TRIM PLATE FOR OPTIONAL WOOD BURNING STOVE CHIMNEY PIPE. STOVE AND PIPE BY OTHERS.
- PROVIDE FEC IN ACCORDANCE WITH NFPA 101, 28.3.5.8.

LEGEND:

- DOOR TYPE, SEE SHEET A6
- WINDOW TYPE, SEE SHEET A6
- KEY NOTE
- FIRE EXTINGUISHER CABINET
- 1-HOUR RATED PARTITION
- ROOM FINISH TYPE DESIGNATION

B11

UNLESS OTHERWISE NOTED, LINEAR DIMENSIONS SHOWN ARE IN MILLIMETERS (MM)
SCALE: 1: 50
SCALE: 1: 100

SYMBOL	DESCRIPTION	DATE	APR

DESIGNED BY:	DATE:	09-30-09
DLB	SUBMITTED BY:	BAKER
DWN BY:	AAR	
CHK BY:	KRC	
FILE NO.:	ANPSDA-101XXX	

Michael Baker Jr., Inc.
A unit of Michael Baker Corporation
Arling Business Park
100 Arling Drive
Moon Township PA 15108
www.mbakercorp.com

STANDARD DESIGN
BARRACK BUILDING (384 GSM)
ELECTRIC HEAT OPTION
FLOOR PLAN

SHEET
REFERENCE
NUMBER:
A1